

zenithinteriors.com

UMBRA Round Acoustic Light

Zenith

Features:

An impressive acoustic lighting luminaire that lights up anything from conferences room to communal dining spaces. As the long, rounded silhouette suspends from the ceiling, it creates an intimate atmosphere and contributes a sheltering feeling of home along with an extra touch of cosy.

Design: IMPACT ACOUSTIC

Options:

- Acoustic panel booster made of felt for additional acoustic absorbtion.

Environmental:

- Cradle to Cradle Certified™
- Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit
- SUPPORTED BY CLIMATE KIC

Warranty: 12 year product & 2 year lighting

Finishes:

100% PET (min. 60% post-consumer)

ARCHISONIC® is a high-performance sustainable acoustic absorber made from up-cycled plastic bottles.

ARCHISONIC® is manufactured at the highest quality standards, yet slight colour and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print.

ARCHISONIC:

					
Shell Pink 102	Jute 920	Soft Coral 516	Ice Blue 304	Winter Sky 410	Spearmint 706
					
Succulent 712	Pacific Ocean 432	Marine Blue 864	Deep Sea 918	Midnight 810	True Navy 194
					
Moss 439	Grove 317	Nordic Pine 311	Fern 180	Sunshine 846	Honeycomb 139
					
Terracotta 239	Electric Orange 464	Hot Pink 140	Poster Red 662	Grape 540	Garnet 724
					
Warm Stone 105	Linen 107	Lichen 160	Snow White 500	Cloud 103	Milk 404
					
Gull 144	Smoke 442	Ground 108	Slate 444	Charcoal 542	Raven 550



Sound Absorption:

DIN ISO 11654
24 mm


- aw 0.55 (no airgap)
- aw 0.65 (50 mm / 2" air gap)
- aw 0.90 (100 mm / 4" air gap)
- aw 0.95 (200 mm / 8" air gap)
- aw 0.95 (300 mm / 11" air gap)

Key Data:

- Voltage: 220 - 240 V
- Power: 19W
- Luminus flux: 1580lm
- Protection class: IP 20 / protection class I
- Colour consistency: SDCM 3
- Life span: >50'000 h (L70 B50)
- Dimming: DALI
- Colour temperature: 4000K

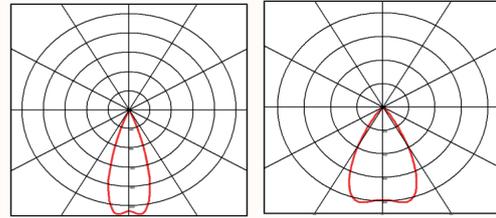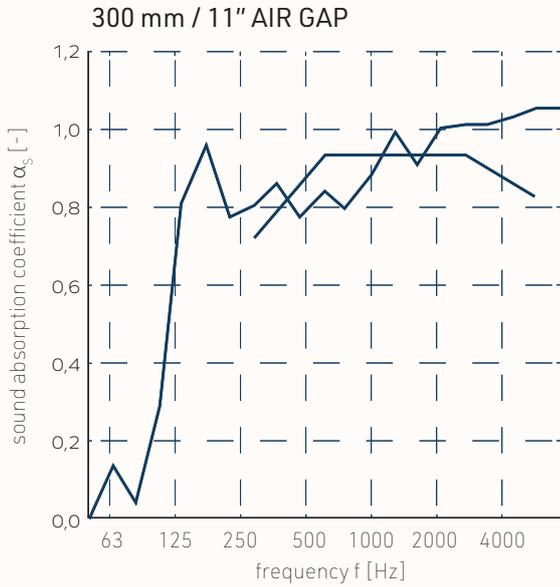


Dimensions




Round 400

Dia 400mm
OH 270mm
Thickness: 12mm




Round 600

Dia 600mm
OH 400mm
Thickness: 12mm




Round 800

Dia 800mm
OH 530mm
Thickness: 12mm



Round 1200

Dia 1200mm
OH 650mm
Thickness: 12mm



Round 1600

Dia 1600mm
OH 850mm
Thickness: 12mm