

zenithinteriors.com

SPARK Acoustic Lighting

Zenith

Features:

From afar, this rounded lampshade presents a classic appearance, but get closer and experience the inherent playful character that sparks life to any space without intruding. Pick from five different sizes or go all-in combining dimensions for an exciting dynamic.

Design: IMPACT ACOUSTIC

Options:

- Acoustic panel booster made of felt for additional acoustic absorption.

Environmental:

- Cradle to Cradle Certified™
- Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit
- VOC Emission CDPH 01350 PASS, ISO 16000 (CDPH/EHLB/STANDARD METHOD V1.2.), EN 16516

Warranty: 12 year product & 2 year lighting

Finishes:

100% PET (min. 60% post-consumer)

ARCHISONIC® is a high-performance sustainable acoustic absorber made from up-cycled plastic bottles.

ARCHISONIC® is manufactured at the highest quality standards, yet slight colour and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print.

ARCHISONIC:

| | | | | | |
|---|--|---|---|---|---|
|  |  |  |  |  |  |
| Shell Pink 102 | Jute 920 | Soft Coral 516 | Ice Blue 304 | Winter Sky 410 | Spearmint 706 |
|  |  |  |  |  |  |
| Succulent 712 | Pacific Ocean 432 | Marine Blue 864 | Deep Sea 918 | Midnight 810 | True Navy 194 |
|  |  |  |  |  |  |
| Moss 439 | Grove 317 | Nordic Pine 311 | Fern 180 | Sunshine 846 | Honeycomb 139 |
|  |  |  |  |  |  |
| Terracotta 239 | Electric Orange 464 | Hot Pink 140 | Poster Red 662 | Grape 540 | Garnet 724 |
|  |  |  |  |  |  |
| Warm Stone 105 | Linen 107 | Lichen 160 | Snow White 500 | Cloud 103 | Milk 404 |
|  |  |  |  |  |  |
| Gull 144 | Smoke 442 | Ground 108 | Slate 444 | Charcoal 542 | Raven 550 |

Sound Absorption:

DIN ISO 11654

24 mm


aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap)

aw 0.90 (100 mm / 4" air gap)

aw 0.95 (200 mm / 8" air gap)

aw 0.95 (300 mm / 11" air gap)

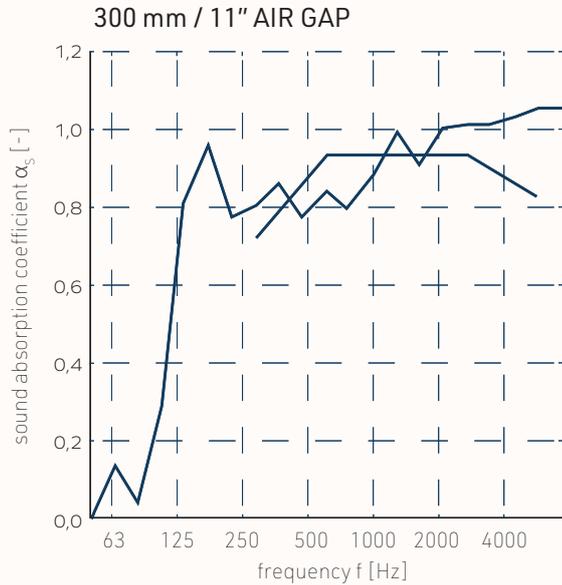

Key Data:

Voltage:

220 – 240 V

Power:

29W

Light distribution:

Direct

Dimming:

Not dimmable
(DALI on request)

Diffuser:

Opal
(Microprism on request)

Luminous flux of the luminaire:

1508lm

Luminous flux of the light source:

2340lm

Protection class:

I

Colour temperature:

4000K,


Colour consistency:

SDCM3

Life span:

> 50'000 h (L70 B50)

Dimensions




Spark 400

Dia 400mm

OH 270mm

Thickness: 12mm




Spark 600

Dia 600mm

OH 400mm

Thickness: 12mm




Spark 800

Dia 800mm

OH 530mm

Thickness: 12mm




Spark 1200

Dia 1200mm

OH 650mm

Thickness: 12mm



Spark 1600

Dia 1600mm

OH 850mm

Thickness: 12mm

Zenith

SPARK
Acoustic Lighting